

"WeatherMAX 80, the best thing to happen in the cover making world in the last ten years."

Dolphin Sails Harwich, UK



WeatherMAX® 80

Super high strength and durability combine with long-term color retention to deliver a truly versatile outdoor fabric for a variety of applications. The industry's most balanced and cost-effective fabric available for marine covers and tops, awnings, or other outdoor applications requiring outstanding durability, higher water repellence and excellent breathability.

10-Year Limited Warranty

(excludes Oyster, Scarlet, True Red and White fabrics which feature a 3-year limited warranty).

WeatherMAX LT

High strength and the same inherent fade resistant properties found in our WeatherMAX 80 fabric, all packed into a true lighter weight fabric. The perfect choice for patio furniture covers, equestrian covers, or other applications where lightweight and ease of packing offer an advantage.

3-Year Limited Warranty

WeatherMAX FR


The proven performance of our innovative WeatherMAX 80 fabric combined with flame resistance properties that meet or exceed the most stringent requirements. WeatherMAX FR is ideally suited for awnings, tents, or any outdoor application requiring resistance to heat and flames, long-term color retention and superior protection from the elements.

5-Year Limited Warranty


(excludes True Red fabrics which feature a 3-year limited warranty).



PACIFIC BLUE X
WeatherMAX 80 29346

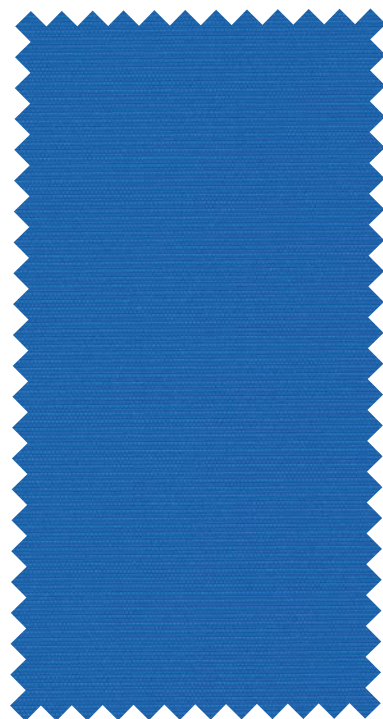

PACIFIC BLUE X
WeatherMAX LT 29345

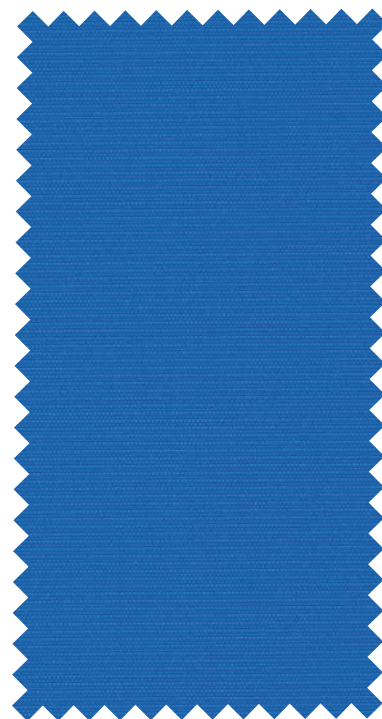

PACIFIC BLUE X
WeatherMAX FR FR346

Properties	WeatherMAX 80	WeatherMAX LT	WeatherMAX FR
Fabric Weight	8.0 oz/yd ² (271 g/m ²)	6.5 oz/yd ² (220 g/m ²)	9.75 oz/yd ² (330 g/m ²)
Thickness	0.41 mm	0.31 mm	0.44 mm
Width-Fused Edge	60 in (152 cm)	60 in (152 cm)	60 in (152 cm)
Put Up	75 yards (69 meters)	100 yards (91 meters)	65 yards (59 meters)
Tensile Strength ASTM D5034 (warp x fill/lbs)	490 x 392	430 x 270	460 x 360
Mullen Burst ASTM D3786 (psi)	420	292	393
Tongue Tear ASTM D2261 (warp x fill/lbs)	20 x 18	15 x 10	13 x 15
Hydrostatic Pressure AATCC 127 (cm)	54	42	90+
Rain Test 2 minutes/600 mm	0.007	0.023	0.00
Spray Rating AATCC 22	100	100	100
Air Permeability Moisture Vapor Transmission (ASTM E96 Procedure B - Open Cup) 1406 g/m ² /24 hours ASTM D737 (cfm)	1.3	1.5	0.2
Cold Crack 40°/ASTM D1912	Pass	Pass	Pass
UPF (Ultraviolet Factor)	50+	50+	50+
UVA & UVB (Ultraviolet Blockage)	Over 99%	Over 99%	Over 99%
Color Fastness to Light AATCC 169 option 1 (1500 hours: scale 1 - 5)	4 - 5	4 - 5	4 - 5
Bundesmann Rating Water Repellency (grand 1 - 5) Water Absorption	5 3.2%	5 3.2%	5 3.2%

Specifications

Made with solution-dyed SaturaMax®. Finished with exclusive HydroMAX+ technology for water, dirt and mildew resistance. WeatherMAX® is also available as WeatherMAX FR for flame retardant applications to meet CSFM T19, CPAI-84, NFPA701, CAN/ULC-S109, FMVSS 302 and ASTM-E84 Class A.

Care Instructions

WeatherMAX fabrics may be spot washed by using a soapy solution of a mild detergent and lukewarm water. Rinse thoroughly with clean water to remove soap and allow to air dry. For mildew stains, prepare a solution of (1) cup bleach plus (½) cup of mild detergent per gallon of water. Spray on the entire area and allow soaking. Rinse with clean water and allow to air dry.

WeatherMAX Warranty


The limited warranty covers only the fabric being unserviceable because of loss of strength and/or color from normal conditions of exposure. That includes sunlight, mildew and atmospheric chemicals. Labor and installation supplied by the fabricator and/or installer are not covered. The consumer is responsible for normal care, cleaning and maintenance of the fabric.

- The warranty runs for 10 years from the date of original purchase for WeatherMAX 80 fabrics. Excludes Oyster, Scarlet, True Red and White fabrics which feature a 3-year limited warranty.
- The warranty runs for 5 years from the date of original purchase for WeatherMAX FR fabrics. Excludes True Red fabrics which feature a 3-year limited warranty.
- The warranty runs for 3 years from the date of original purchase for WeatherMAX LT fabrics.
- Safety Components will supply new fabric, free of charge, to replace the unserviceable fabric.
- Call your dealer who will contact Safety Components to request fabric replacement.
- A valid copy of the original invoice, showing date of purchase, is required for fabric replacement.
- This warranty gives you specific legal rights and you may also have other rights which vary from state to state. See website for warranty details.



United States Patent No. 9,121,131. Canadian Patent No. 2492753. WeatherMAX, HydroMAX+ and ColorTite are trademarks or registered trademarks of Safety Components, Inc. SaturaMax is a registered trademark of Unifi, Inc.

WeatherMAX®
What Fabric Can Do™

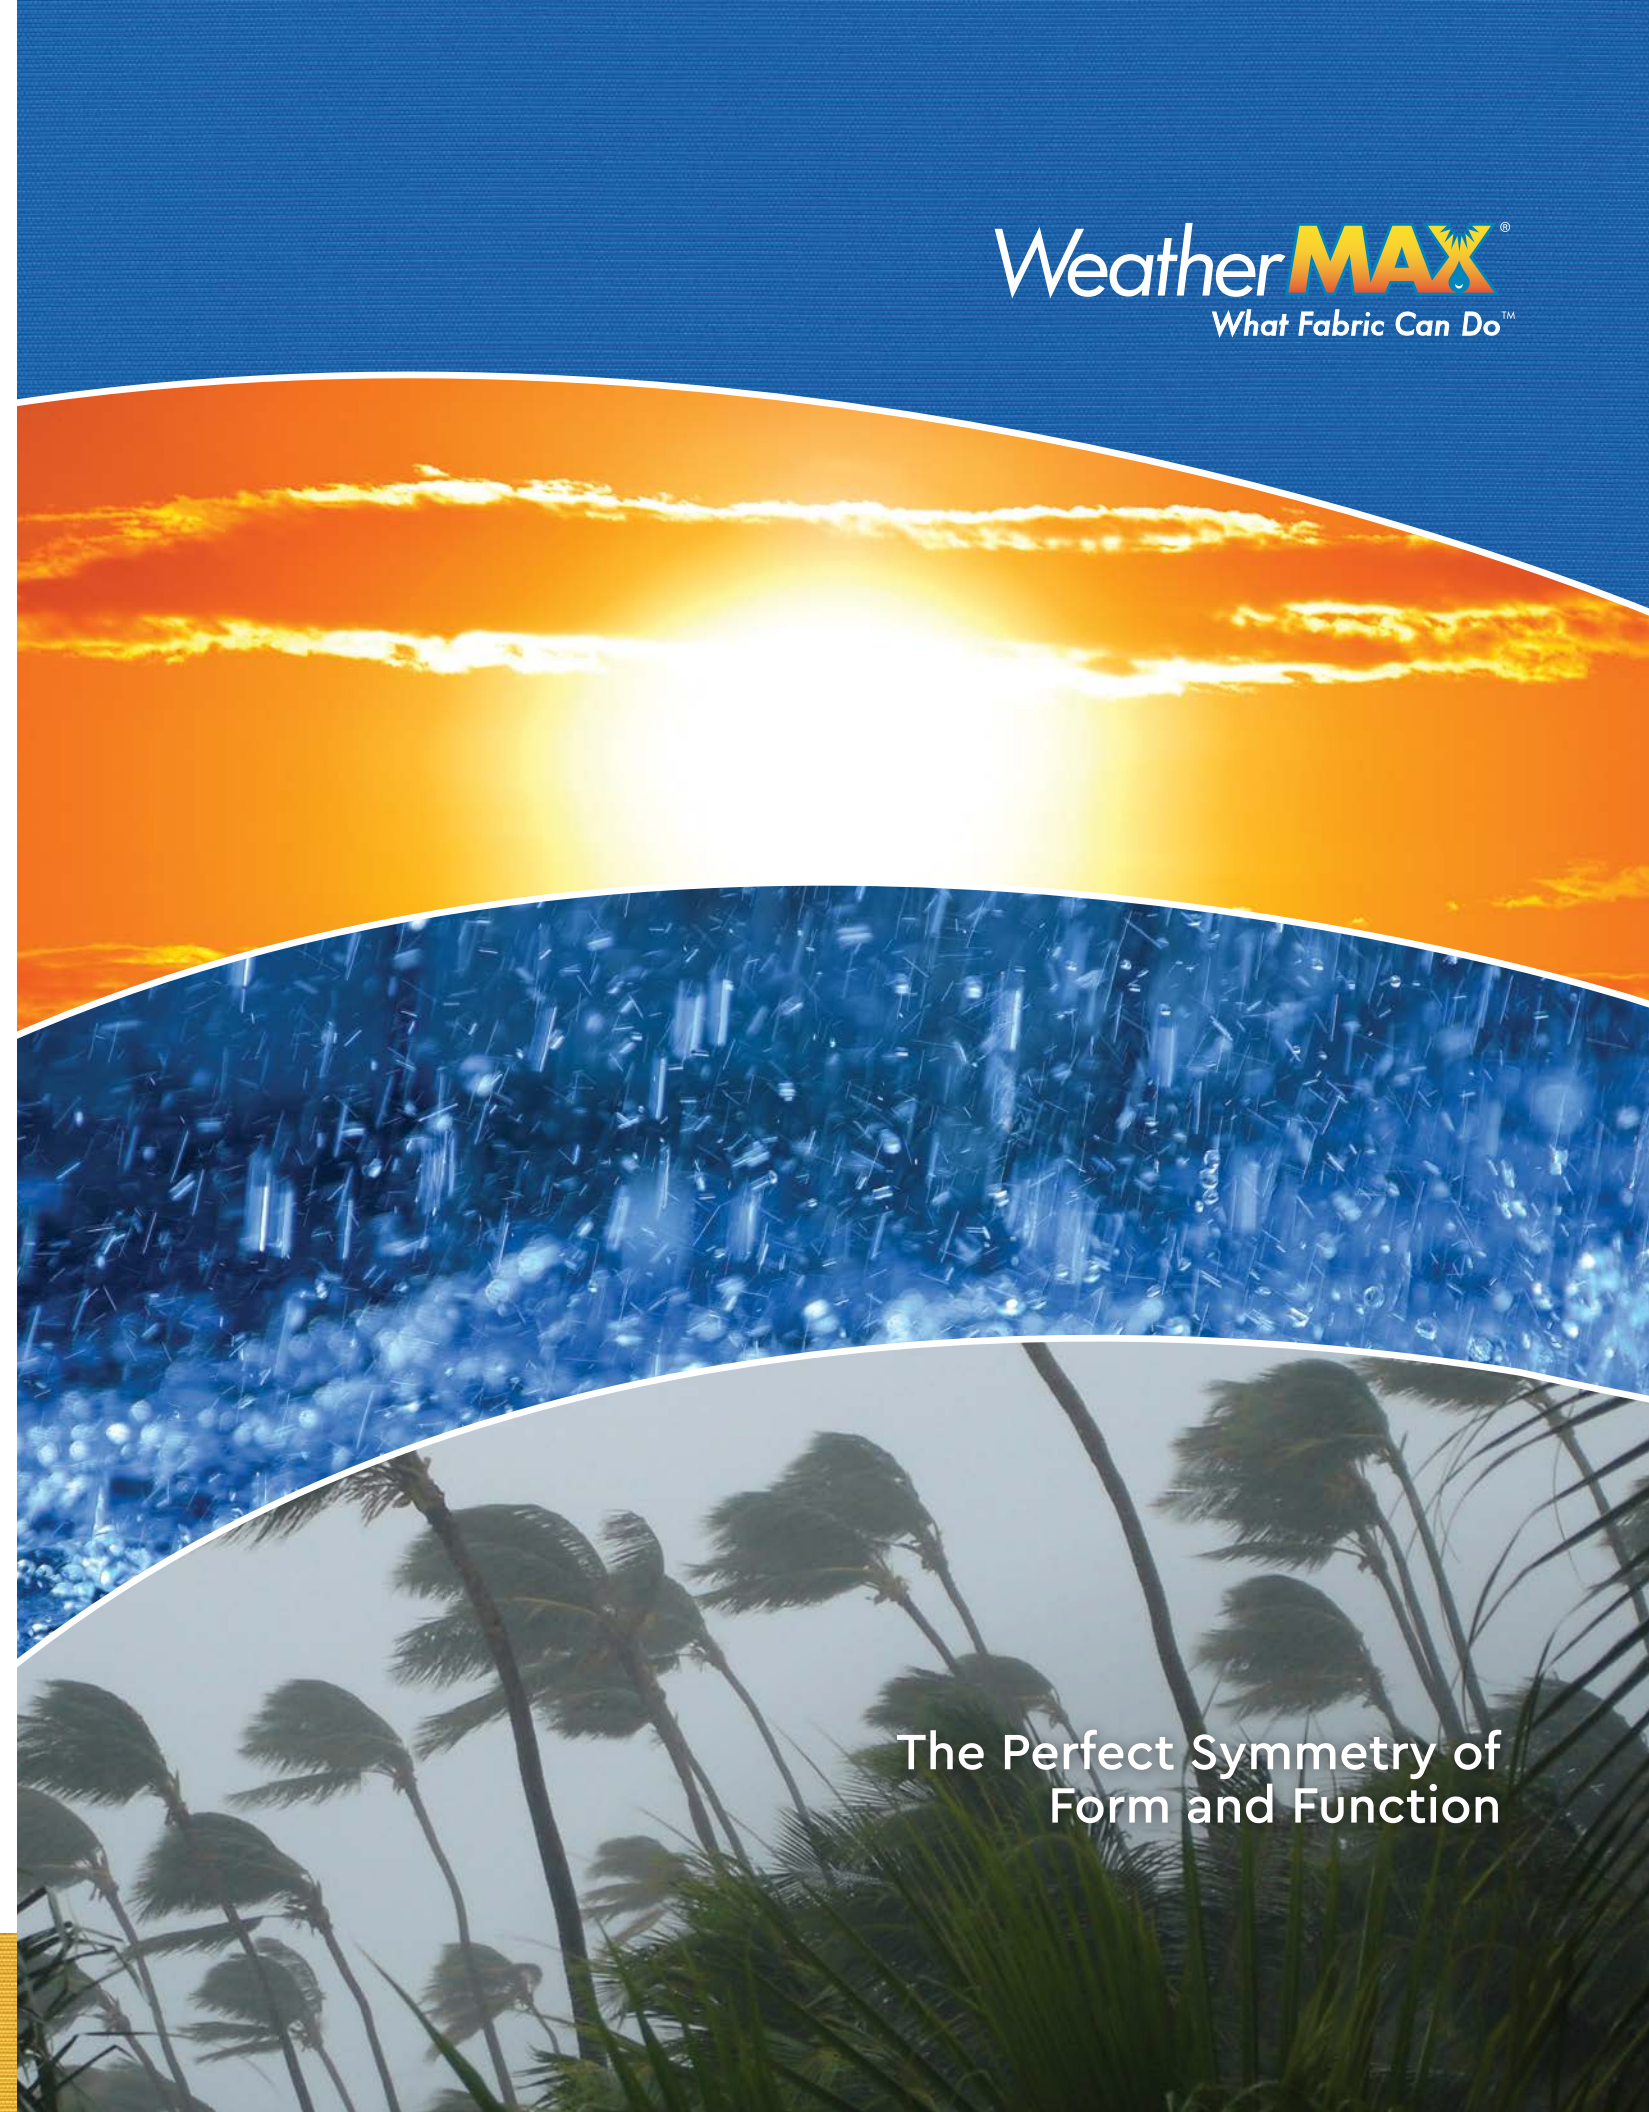

The Perfect Symmetry of
Form and Function



40 Emery Street
Greenville, SC 29605
800.896.6926 ext. 14
www.weathermax.com





High Performance Outdoor Fabric


From the blistering sun of the Australian outback to the soaking rains of the Brazilian rain forests, nothing handles the changing moods of Mother Nature better than WeatherMAX[®].

WeatherMAX is the utility infielder of outdoor fabrics. It performs great in whatever application you put it, whether you need high strength, lightweight, superior water resistance or high breathability. This patented fabric is unmatched with its overall performance, durability, protection level and ease of handling.

Don't let its attractive appearance and ease of handling obscure the fact—this is one of the strongest outdoor fabrics available. The exclusive SaturaMax fiber is the backbone of our patented WeatherMAX fabric and combined with its unique weave and new advanced HydroMAX+ breathable storm resistant finish, WeatherMAX is even better than before



PACIFIC BLUE
WeatherMAX 80 29346
WeatherMAX LT 29345
WeatherMAX FR FR346




TOAST
WeatherMAX 80 29348
WeatherMAX LT 29347
WeatherMAX FR FR348




BEIGE
WeatherMAX 80 29389



ROYAL
WeatherMAX 80 29401
WeatherMAX FR FR401




SAND
WeatherMAX 80 29376




MOSS
WeatherMAX 80 29403
WeatherMAX FR FR403




FOREST GREEN
WeatherMAX 80 29342
WeatherMAX LT 29341
WeatherMAX FR FR342




CAPTAIN NAVY
WeatherMAX 80 29354
WeatherMAX 80W 29462
WeatherMAX LT 29335
WeatherMAX FR FR354



OYSTER
WeatherMAX 80* 29423




TAUPE
WeatherMAX 80 29377




BURGUNDY
WeatherMAX 80 29338




BLACK
WeatherMAX 80 29355
WeatherMAX 80W 29439
WeatherMAX LT 29335
WeatherMAX FR FR355




MIST
WeatherMAX 80 29468
WeatherMAX LT 29469




WHITE
WeatherMAX 80* 29371
WeatherMAX LT 29372



SCARLET
WeatherMAX 80* 29374



LIGHT CHARCOAL
WeatherMAX 80 29334
WeatherMAX 80W 29446
WeatherMAX LT 29333
WeatherMAX FR FR334




GRAPHITE
WeatherMAX 80 29431
WeatherMAX FR FR431



YELLOW
WeatherMAX 80 29352
WeatherMAX LT 29350




TRUE RED
WeatherMAX 80* 29344
WeatherMAX FR FR344

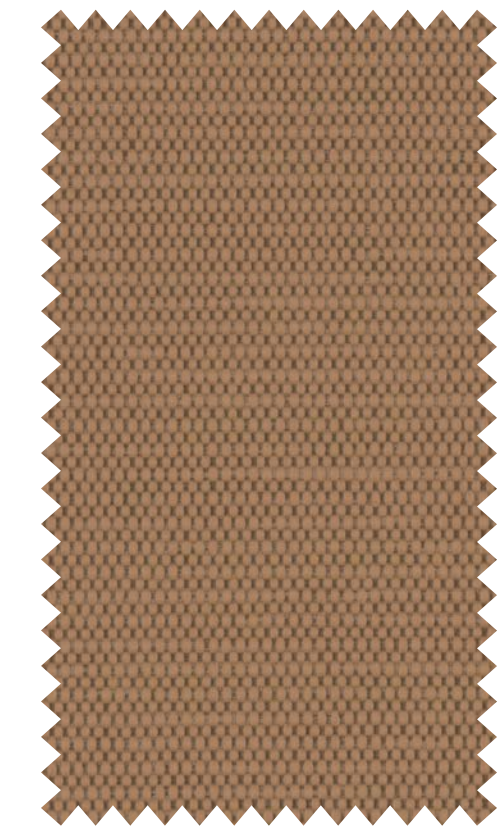

SANDSTONE HEATHER
WeatherMAX 80 29470



SLATE HEATHER
WeatherMAX 80 29471

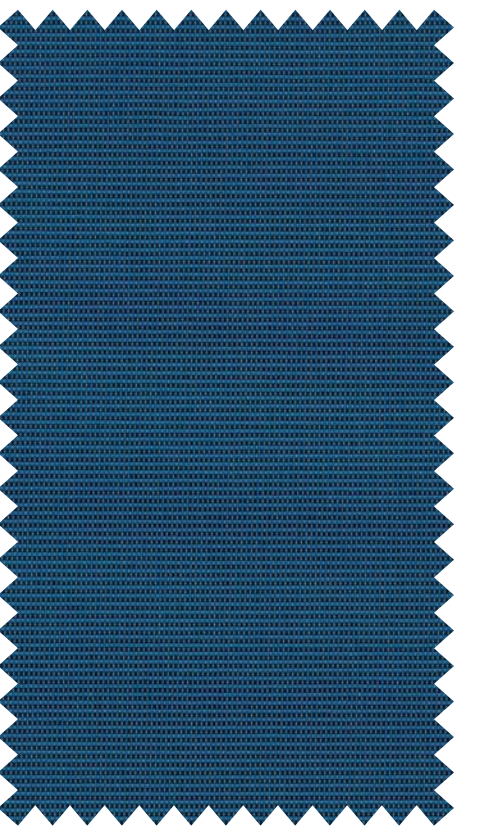


SAPPHIRE TWEED
WeatherMAX 80 29396

Tweed fabrics have a lighter & darker side. Either side can serve as the outer face.


Color Retention

Solution-dyed fabrics

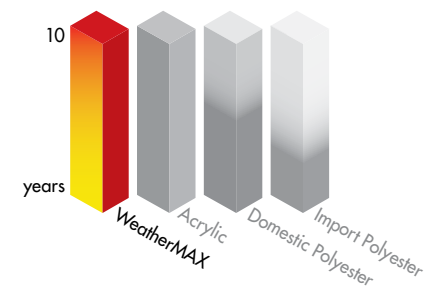


Fabric Strength

WeatherMAX has almost 2x the breaking strength




Moisture Vapor Transmission

ASTM E96

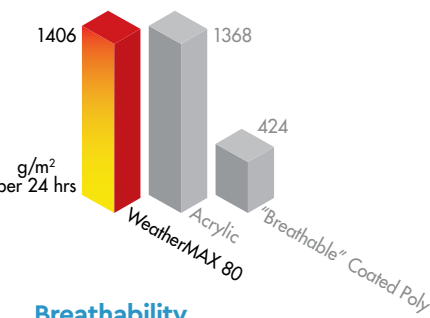


Taber Abrasion Resistance

WeatherMAX is 6x more durable

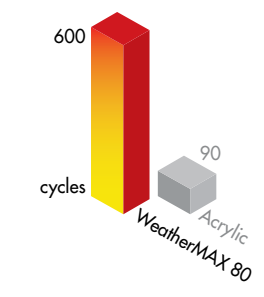


Hydrostatic Pressure

WeatherMAX is 33% more water resistant



Breathability

ASTM D737

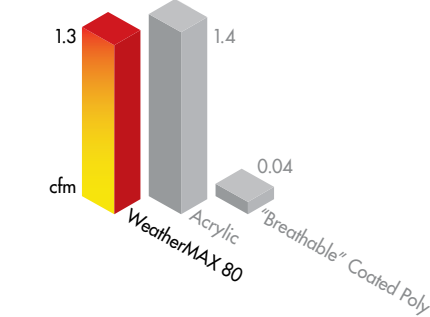

W: Denotes 80" wide goods. *Denotes 3-year limited warranty.